



Tel:+86-755-21001830

Fax:+86-755-21001840

E-mail:market@qualamp.com

Web:www.qualamp.com

Add:Building F, Chuangxin Industrial Park, Jingtian Road,  
Guanglan Town,Longhua,Shenzhen,China.



## INDUSTRIAL LIGHTING SOLUTIONS

 **Qualamp**<sup>®</sup>

We provide quality lamps

—— 2017 ——



# ABOUT US

Qualamp is one of the leading companies engaged in R&D、 manufacturing and global marketing of office lightings and industrial lightings in Shenzhen , China. Since establishment in 2012, We has been devoting to providing professional services to global customers in the professional LED lighting industry, including research and production as well as LED lighting solution design. After 5 years hard working, now we have over 100 employees with 3000 square meters factory in Shenzhen. All of our products are CE certified and Rosh compliant, some of the products are UL/ETL、 DLC、 TUV、 ErP、 PSE、 SAA or customer required.

QUALAMP means QUALITY LAMP, We provide quality lamps, our products and service have been highly recognized by customers all over the world. The vision of Qualamp is to decorate the world by offering excellent lamps at affordable prices to all consumers world-wide and to become a multi-national business group undertaken in the green lighting products.





# CONTENTS

QL-UFO Application	01
QL-UFO-01	02-03
QL-UFO-02	04-05
QL-UFO-03	06-07
QL-UFO-04	08-09
QL-SH-01	10-11
QL-SH-02	12-13
QL-LH Application	14-15
QL-LH-01	16-17
QL-TL Application	18-19
QL-TL-01	20-21
QL-FL-CF/ZF Application	22-23
QL-FL-CF	24-25
QL-FL-ZF	26-27




QL-UFO-01

100W/150W/200W




- Dia-casting aluminum heat dissipation solution;
- High-Brightness Lumileds chips, 120lm/w;
- MeanWell HBG series driver;
- 5 years warranty.




80-100W

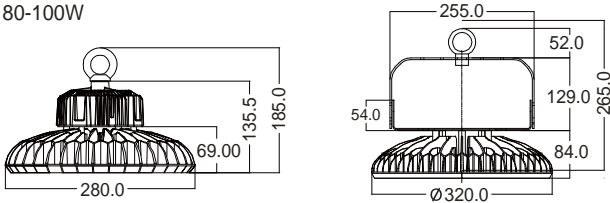

100-150W

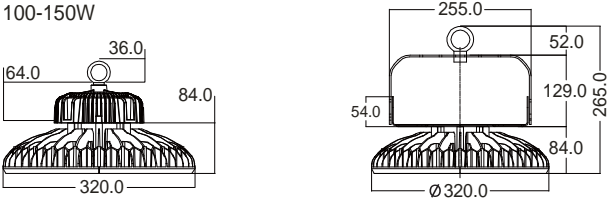

180-240W

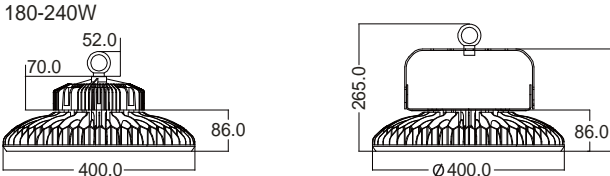

Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-UFO-01-100W	2700-6500K	LUMILEDS 3030 112pcs	100W	11050-12230	90° 120°	AC100-277V 50/60Hz	>80	65	>0.9
QL-UFO-01-150W	2700-6500K	LUMILEDS 3030 175pcs	150W	16510-18110					
QL-UFO-01-200W	2700-6500K	LUMILEDS 3030 238pcs	200W	22080-24140					





QL-UFO-02

50/100W/150W/200W



- Dia-casting aluminum body;
- Built in fan,double insurance heat dissipation;
- High-Brightness Lumileds chips, 120lm/w;
- 3 years warranty.

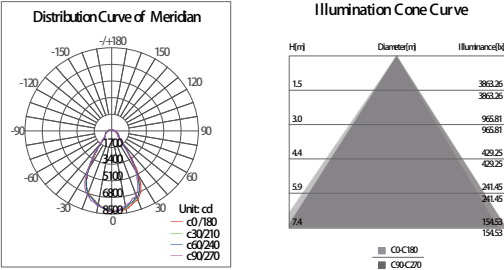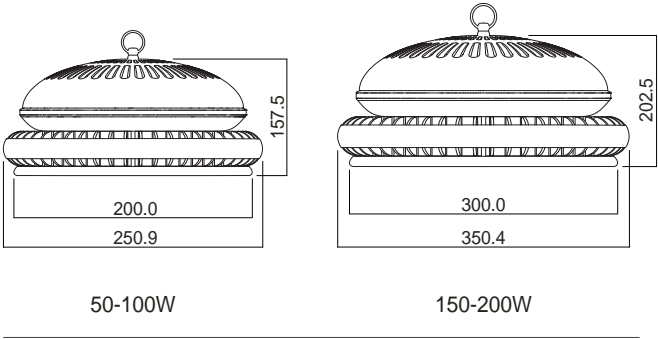



Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-UFO-02-50W	2700-6500K	LUMILEDS 3030	50W	>5000	60° 90°	AC100-277V 50/60Hz	>70	44	>0.9
QL-UFO-02-100W	2700-6500K	LUMILEDS 3030	100W	>10000					
QL-UFO-02-150W	2700-6500K	LUMILEDS 3030	150W	>15000					
QL-UFO-02-200W	2700-6500K	LUMILEDS 3030	200W	>20000					

QL-UFO-03

100W/150W/200W



- 1070 pure Aluminum radiator,excellent heat dissipation;
- Slim body,40% lighter than die-casting light;
- High-Brightness Lumileds chips,140lm/w;
- MeanWell HBG series driver;
- UGR<25 with lens
- 5 years warranty.

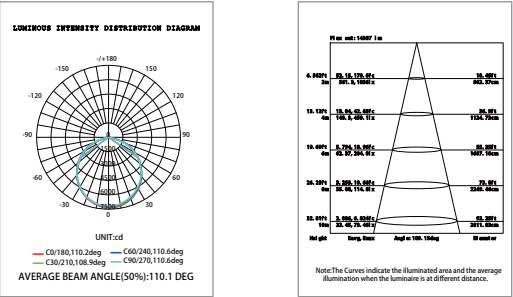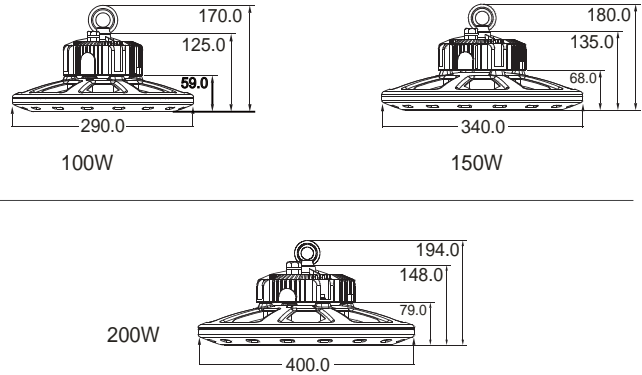




Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-UFO-03-100W	2700-6500K	LUMILEDS 3030 133pcs	100W	12100-14100	60° 90° 120°	AC100-277V 50/60Hz	>80	65	>0.9
QL-UFO-03-150W	2700-6500K	LUMILEDS 3030 210pcs	150W	18905-21240					
QL-UFO-03-200W	2700-6500K	LUMILEDS 3030 280pcs	200W	23600-28000					

QL-UFO-04

100W/150W/200W



- Fin radiator heat dissipation solution;
- 20% lighter than die-casting light;
- High-Brightness Lumileds chips,130lm/w;
- MeanWell HBG series driver;
- UGR < 25 with lens
- 5 years warranty.

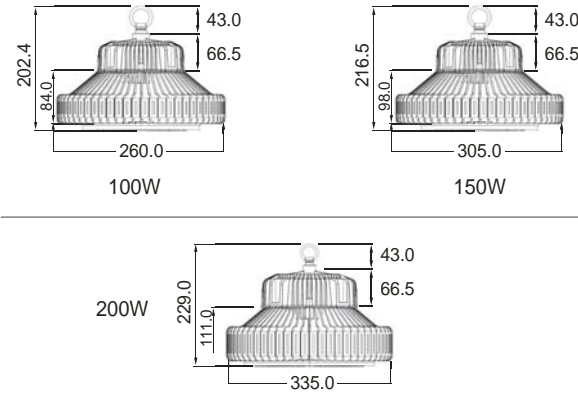

Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-UFO-04-100W	2700-6500K	LUMILEDS 3030 119pcs	100W	12010-13500	60°	AC100-277V 50/60Hz	>80	65	>0.9
QL-UFO-04-150W	2700-6500K	LUMILEDS 3030 196pcs	150W	18000-20400					
QL-UFO-04-200W	2700-6500K	LUMILEDS 3030 266pcs	200W	23800-26800					




QL-SH-01


50W/100W/150W/200W




- AC IC Direct Driver solution;
- Fin radiator heat dissipation solution;
- 60% lighter and economy than die-casting series;
- UGR <25 with lens
- 3 years warranty.




50W





100W



150W



200W




Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-SH-01-50W	2700-6500K	2835/80pcs	50W	4150-4800	60°	AC110V OR 220V 50/60Hz	>80	43	>0.98
QL-SH-01-100W	2700-6500K	2835/135pcs	100W	8900-10000					
QL-SH-01-150W	2700-6500K	3030/177pcs	150W	13650-15600					
QL-SH-01-200W	2700-6500K	3030/247pcs	200W	18200-20800					

QL-SH-02


50W/100W





- AC IC Direct Driver solution;
- Fin radiator heat dissipation solution;
- 80% lighter than die-casting series,super slim;
- UGR <25 with lens
- 3 years warranty.

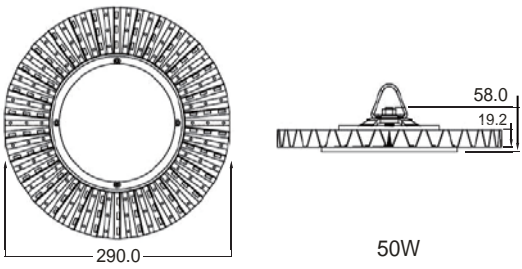

50W

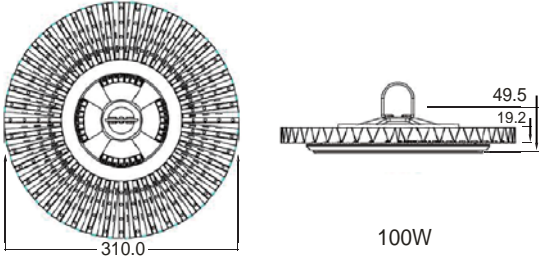

100W



Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-SH-02-50W	2700-6500K	2835/80pcs	50W	4150-4800	60°	AC110V OR 220V 50/60Hz	>80	43	>0.98
QL-SH-02-100W	2700-6500K	2835/200pcs	100W	8820-9810					










QL-LH-01


50W/100W/150W/200W  
250W/300W




- Extrusion aluminum body;
- New designed air flow dissipation solution;
- High-Brightness Lumileds chips,130lm/w;
- MeanWell ELG/HLG series driver;
- UGR <25 with lens
- 5 years warranty.




50W




100W




150W



200W



250W



300W

Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-LH-01-50W	2700-6500K	LUMILEDS 3030 56pcs	50W	5750-6750	30° 60° 90° 30° 70° 70° 140° 60° 120°	AC100-277V 50/60Hz	>80	65	>0.9
QL-LH-01-100W	2700-6500K	LUMILEDS 3030 112pcs	100W	11600-13500					
QL-LH-01-150W	2700-6500K	LUMILEDS 3030 168pcs	150W	17250-20250					
QL-LH-01-200W	2700-6500K	LUMILEDS 3030 224pcs	200W	23000-27040					
QL-LH-01-250W	2700-6500K	LUMILEDS 3030 280pcs	250W	28750-33750					
QL-LH-01-300W	2700-6500K	LUMILEDS 3030 336pcs	300W	34500-40500					




QL-TL-01

50W/100W/150W/  
200W/250W



- Modular design,beautiful appearance;
- MeanWell driver;
- PHILIPS chips,140LM/W;
- UGR <25 with lens;

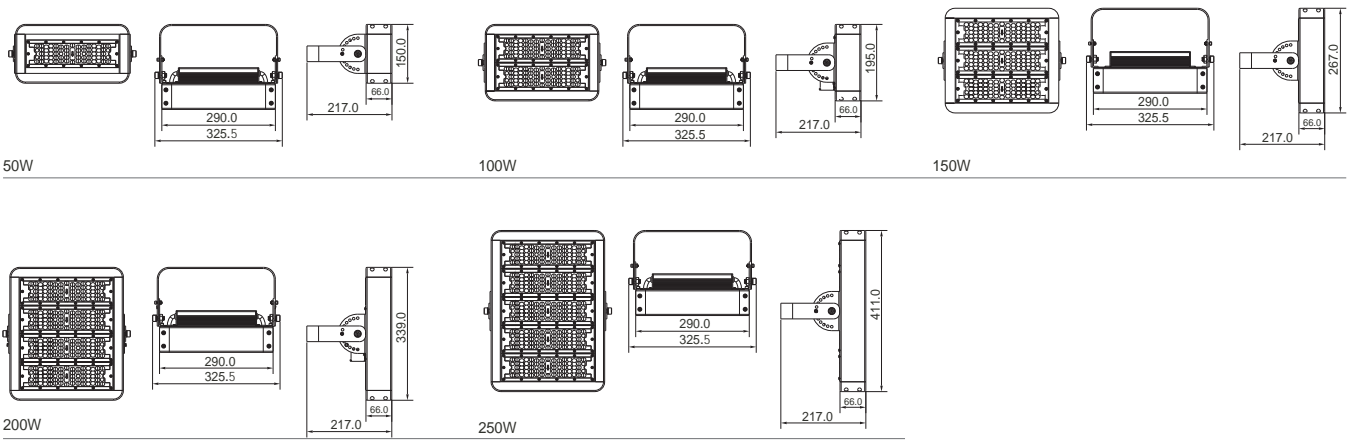

Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-TL-01-50W	2700-6500K	LUMILEDS 3030 64pcs	50W	6435-7038	30° 60° 90° 80° 150° 90° 120°	AC100-277V 50/60Hz	>80	>65	>0.9
QL-TL-01-100W	2700-6500K	LUMILEDS 3030 128pcs	100W	12988-14848					
QL-TL-01-150W	2700-6500K	LUMILEDS 3030 192pcs	150W	19400-21028					
QL-TL-01-200W	2700-6500K	LUMILEDS 3030 256pcs	200W	25990-28100					
QL-TL-01-250W	2700-6500K	LUMILEDS 3030 320pcs	250W	32350-35100					








QL-FL-CF

10W/20W/30W/50W  
70W/100W



- Adopt waterproof design, no adhesive to cause leakage of aging, easy to disassemble;
- Die-casting aluminum alloy lamp body,high toughened glass cover; solid and durable,corrosion-proof;
- High efficiency thermal management,LEDs and power supply work in low temperature, and high stability of continuous operating.
- Can on-off frequently, no flicker and glare; high CRI;
- Compact appearance,novel design,easy to install and transport.

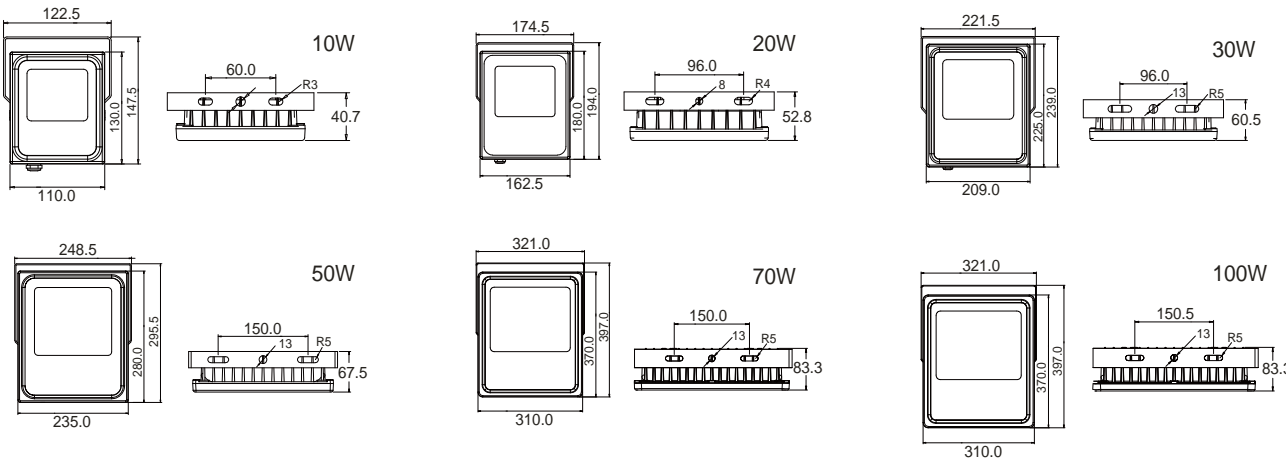




Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-FL-CF-10W	2700-6500K	Bridgelux COB 1pcs	10W	720-825	120°	AC85-265V 50/60Hz	>70	65	>0.9
QL-FL-CF-20W	2700-6500K	Bridgelux COB 1pcs	20W	1558-1728					
QL-FL-CF-30W	2700-6500K	Bridgelux COB 1pcs	30W	2570-2801					
QL-FL-CF-50W	2700-6500K	Bridgelux COB 1pcs	50W	4158-4837					
QL-FL-CF-70W	2700-6500K	Bridgelux COB 1pcs	70W	6090-6763					
QL-FL-CF-100W	2700-6500K	Bridgelux COB 2pcs	100W	8793-9770					

QL-FL-ZF

10W/20W/30W  
50W/100W



- Adopt waterproof design, no adhesive to cause leakage of aging, easy to disassemble;
- Die-casting aluminum alloy lamp body,high toughened glass cover; solid and durable,corrosion-proof;
- High efficiency thermal management,LEDs and power supply work in low temperature, and high stability of continuous operating.
- Can on-off frequently, no flicker and glare; high CRI;
- Compact appearance,novel design,easy to install and transport.

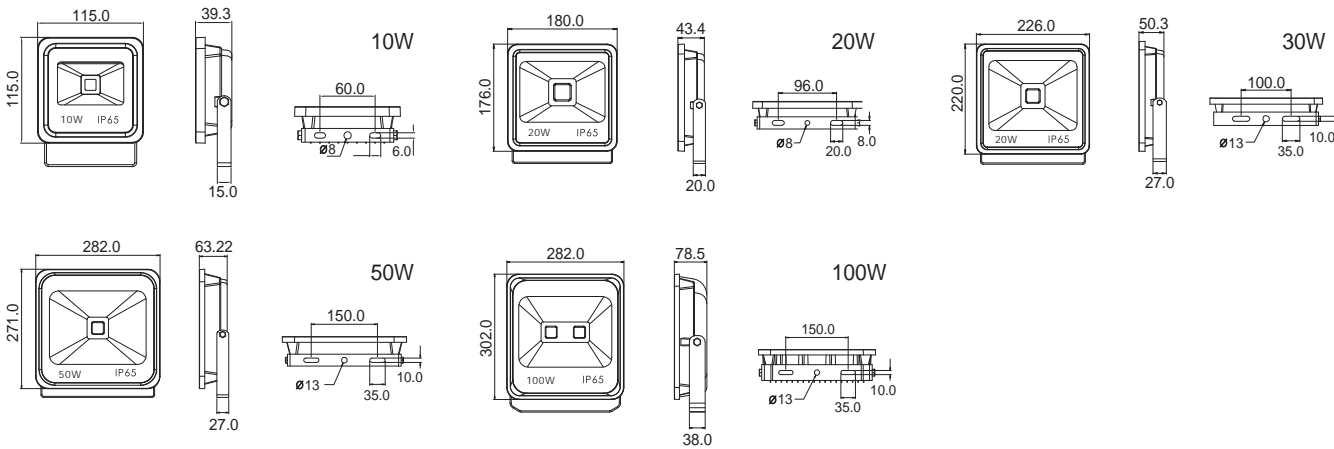

Model	CCT	LED type/Qty	Power (±10%)	Lumen (±10%)	Beam angel	Voltage Frequency	CRI	IP	PF
QL-FL-ZF-10W	2700-6500K	Bridgelux COB 1pcs	10W	703-784	120°	AC85-264V 50/60Hz	>70	65	>0.5
QL-FL-ZF-20W	2700-6500K	Bridgelux COB 1pcs	20W	1500-1641	120°	AC85-265V 50/60Hz	>70	65	>0.9
QL-FL-ZF-30W	2700-6500K	Bridgelux COB 1pcs	30W	2527-2660					
QL-FL-ZF-50W	2700-6500K	Bridgelux COB 1pcs	50W	4050-4595					
QL-FL-ZF-100W	2700-6500K	Bridgelux COB 2pcs	100W	8015-9281					